
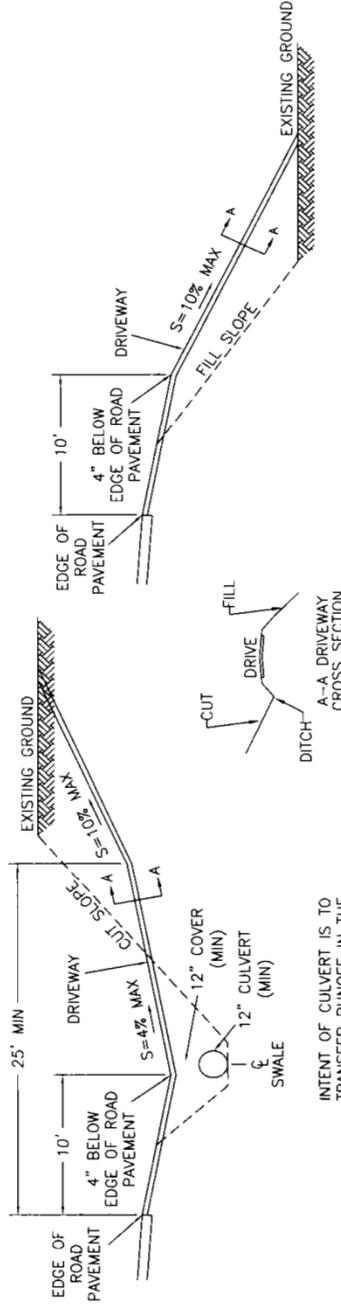


DRIVEWAY ENTRANCE DETAIL

NOT TO SCALE

WITHIN THE TOWN RIGHT-OF-WAY THE DRIVEWAY SHALL BE CONSTRUCTED WITH MINIMUM OF:
 12" CRUSHED GRAVEL OR
 10" CRUSHED GRAVEL AND 2" TYPE "F" BITUMINOUS PAVEMENT

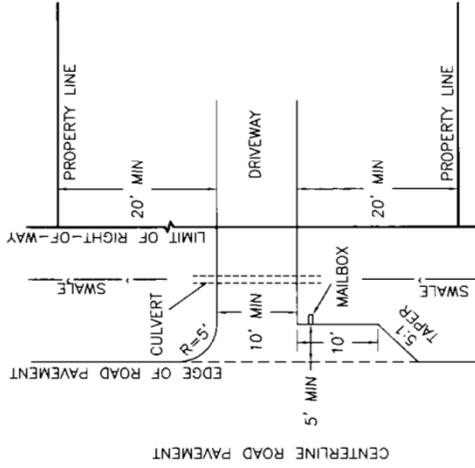

INTENT OF CULVERT IS TO TRANSFER RUNOFF IN THE SWALE FROM UPHILL SIDE TO THE DOWNHILL SIDE. THE INVERTS SHOULD MATCH THE BOTTOM OF THE SWALE WHILE MAINTAINING 12" OF COVER OVER THE PIPE.

