

HISTORIC PRESERVATION ASSISTANCE PROJECT

Strafford Rockingham Regional Council

1 Water Street, Exeter, New Hampshire


Phone: (603) 778-0885

TOWN: Kingston	COUNTY: Rockingham	UTM: Z 12 /E 399150 /N 4753200
SURVEY NUMBER: 50		USGS QUAD: E 10000 10000 10000
COMMON NAME: The Cheney House		FUNCTIONAL TYPE: Dwelling
HISTORIC NAME: Stickney Bros. House		PRESENT USE: Unknown
LOCATION: N. side Danville Rd., .5 miles E. of Long Pond Road		ARCHITECT/BUILDER: Stickney Brothers
OWNER: Roland Cheney		CONDITION: Exc. <u>Good</u> Fair <u>Poor</u> Ruins <u> </u>
ADDRESS: 77 Danville Road, Kingston, NH		INTEGRITY: Original Site <u> </u> Moved <u> </u> (When: <u> </u>)
MAP & PARCEL #: R22-50		Major alterations & date: Unknown
DATE: C. 1830		
SOURCE: Inspection		
STYLE: Greek Revival		LEVEL/SIGNIFICANCE: Natl <u> </u> State <u> </u> Local <u> </u>

GENERAL DESCRIPTION: Structural System

- FOUNDATION: Stone Brick Concrete Concrete Block
- WALL STRUCTURE: Wood Frame Post & Beam Ballon Frame Other
Load Bearing Masonry Stone Brick Concrete Block Other
Metal Iron Steel Other
- WALL COVERING: Clapboard Wood Shingle Board & Batten Shiplap Aluminum
Novelty Stucco Stone Brick Sheet Metal Asphalt Shingles Vinyl
Asphalt Sheeting Composite Board Other
- ROOF SHEATHING: Wood Shingle Asphalt Shingle Standing Seam Tin Slate
Pressed Metal Sheet Metal Rolled Asphalt Other
- ENGINEERING STRUCTURE:
- OTHER:
of Stories # of Bays Approx. Dimensions
Roof Style: Gable Hip Gambrel Flat Shed Mansard Jerkinhead
Monitor Sawtooth Other
Appendages: Porches Towers Dormers Bay Windows Ells Chimneys
Wings Cupolas Sheds Garage Other
Entry Location: Center Sidehall Other

MAP (Indicate North in circle):

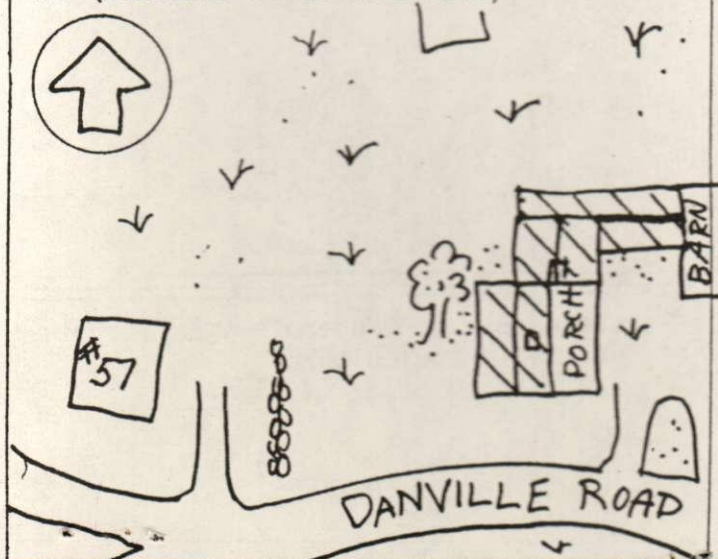

PHOTO



Description of View:

Photographer:
Negative with: S.R.R.C.
Negative File Number: 10-20-2-3/23-29A

ADDITIONAL ARCHITECTURAL AND STRUCTURAL DESCRIPTION:

The Cheney House is a 2-story Greek revival style structure, with its gable end oriented toward the street. The recessed sidehall entry has a 4 panelled door with one large light. It is flanked by pilasters which rise to meet a full entablature with a pedimented motif. Windows are two over one except in the gable, which contains a six over six window. The medium pitched roof is topped by a tall corbel capped chimney and the eaves treatment consists of a boxed cornice with a wide frieze. Corner pilasters with recessed panels rise to meet the pedimented gable.

There is a 1 story hip roofed porch along the east elevation.

A 2 story gable roofed ell has the same siding, foundation and windows as the main block. It has close eaves.

A 1 story gable roofed shed extends to the east. It has clapboard siding, close eaves, six over six windows, and a horizontally sliding door. It rests on a granite block foundation.

RELATED STRUCTURES AND CONTEXT: A large 1-story gable roofed barn has clapboard siding, six over six windows, horizontally sliding doors, and a fieldstone foundation. There is an attached 1-story shed/garage with the same siding, foundation and windows as the barn.

BOUNDARY AND ACREAGE DESCRIPTION: 0.3 Acres. Bounded to the N. by Cheney Mill Road, S. by Danville Road, E. by Demers, Cheney, and Kerry, W. by Tewksbury.

REFERENCES:

Kingston Historic Advisory Committee; interview w/members, Spring 1980
1856 Map
1892 Map

STATEMENT OF SIGNIFICANCE (Evaluation & Historical Associations):

The Stickney Brothers House is a well-developed example of the Greek Revival style and also noteworthy as an example of continuous architecture. The site is particularly complimentary with its acres of open pasture land.

House was built by the Stickney brothers. When one died, his widow married the second brother.

Map Data: 1856: D. Stickney
1892: Mrs. J. P. Stickney

MAP DATA 1856-1892, D. Webster

SURROUNDING ENVIRONMENT: Open Land ☒ Woodland ☐ Scattered Bldgs ☒ Moderately Built Up ☐
Densely Built Up ☐ Residential ☐ Commercial ☐ Industrial ☐ Agricultural ☒
Roadside Strip Development ☐ Other ☐

Recorded By: Scott Novak, Herb Bubert

Date: 2/19/00

